





FATH +  flowSort

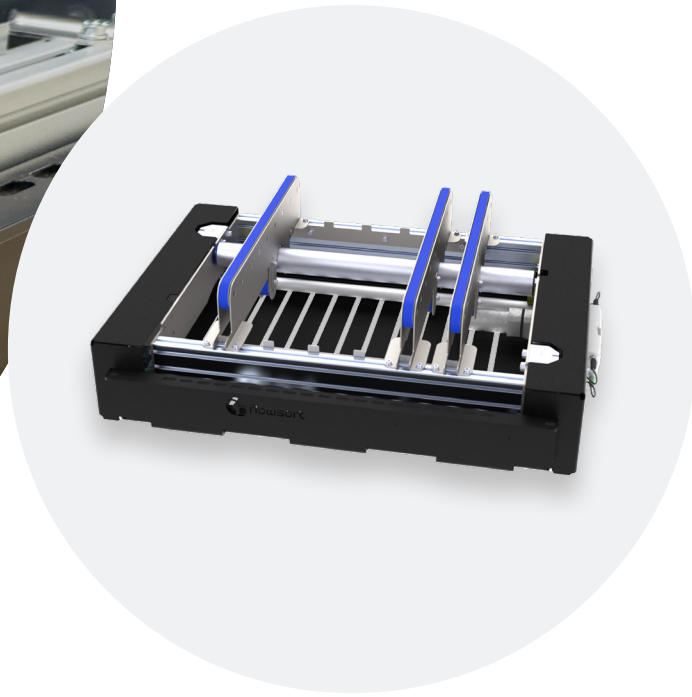

X-FLOW 90 90° TRANSFER UNIT

Flexible and robust solution for every conveyor system



ROBUST AND STRONG

Up to 50 kg lift capacity



SPECIAL BELT

Our belts are made of a special, anti-slip composite material and are internally guided to ensure the belts do not jump of the rollers



MODULAR

Standard modules that fit into every conveyor system



SHORT LEAD TIME


Get your product in just 6 weeks!

FATH

flow-sort

X-FLOW 90

A unique design for transferring products at a 90° angle

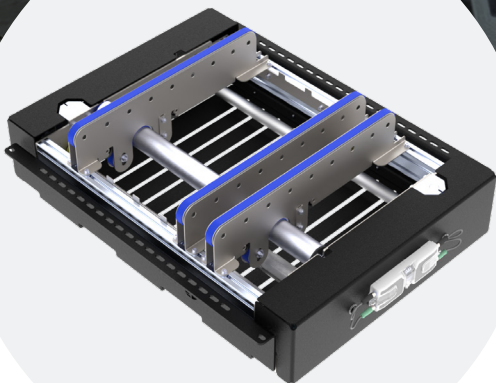

PRODUCT SPECIFICATIONS

X-FLOW 90

90° transfer unit

PRODUCT INFORMATION

Standard width
Module height
Module length
Diverting angle

400 & 600, up to 820 mm
272 mm (mounted between frames)
710 mm & 870 mm
-90° & +90°

SORTING INFORMATION

Maximum sorting capacity
Minimum parcel dimension
Maximum load

1700 pph
150 mm x 150 mm
50 kg

CONTROL

Motor drive for lift
Motor drive for transport belt
Maximum speed
Controller options

24V Pulse Gear Drive
24V Pulse Gear Drive
0.41 m/s
24V ConveyLinx-Ai2
24V MotionLinx-Ai



X-Flow 90

CONTACT US

+31 [0]85-0761339

info@flow-sort.com

www.flow-sort.com